

HF-ERW

Characteristics

1 Superior Material

NIPPON STEEL production system begins with advanced metallurgy and clean BOF steelmaking practices. After continuous casting, at hot-rolling process, hot-rolled strip of optimum quality for pipe making is produced.

2 High Dimensional Accuracy

High uniform wall thickness and smooth finish free from nonmetallic inclusions and surface defects provide Linepipe with a superior level of quality and excellent dimensional accuracy as well as high performance properties.

3 Variety of Products


- 1 High strength linepipe
- 2 High toughness linepipe
- 3 Anti-Sour linepipe
- 4 OCTG pipe

4 High Reliability of Weld

The unique welding condition control and monitoring system ensures quality of the weld along its entire length.

5 Excellent Quality

From steelmaking to pipe manufacture, quality is strictly controlled through every production step to ensure pipe products. Testing and inspection include body lamination UST, highly sensitive UST for weld seam, hydrostatic testing and numerous mechanical tests.

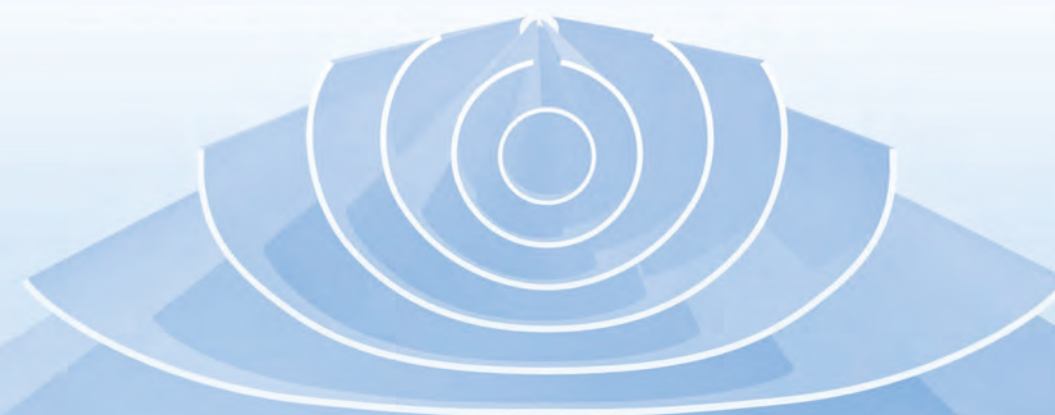


Notice: While every effort has been made to ensure the accuracy of the information contained within this publication, the use of the information is at the reader's risk and no warranty is implied or expressed by NIPPON STEEL CORPORATION with respect to the use of the information contained herein. The information in this publication is subject to change or modification without notice. Please contact the NIPPON STEEL CORPORATION office for the latest information.


Please refrain from unauthorized reproduction or copying of the contents of this publication.

The names of our products and services shown in this publication are trademarks or registered trademarks of NIPPON STEEL CORPORATION, affiliated companies, or third parties granting rights to NIPPON STEEL CORPORATION or affiliated companies. Other product or service names shown may be trademarks or registered trademarks of their respective owners.

24-inch Mill Manufacturing Process

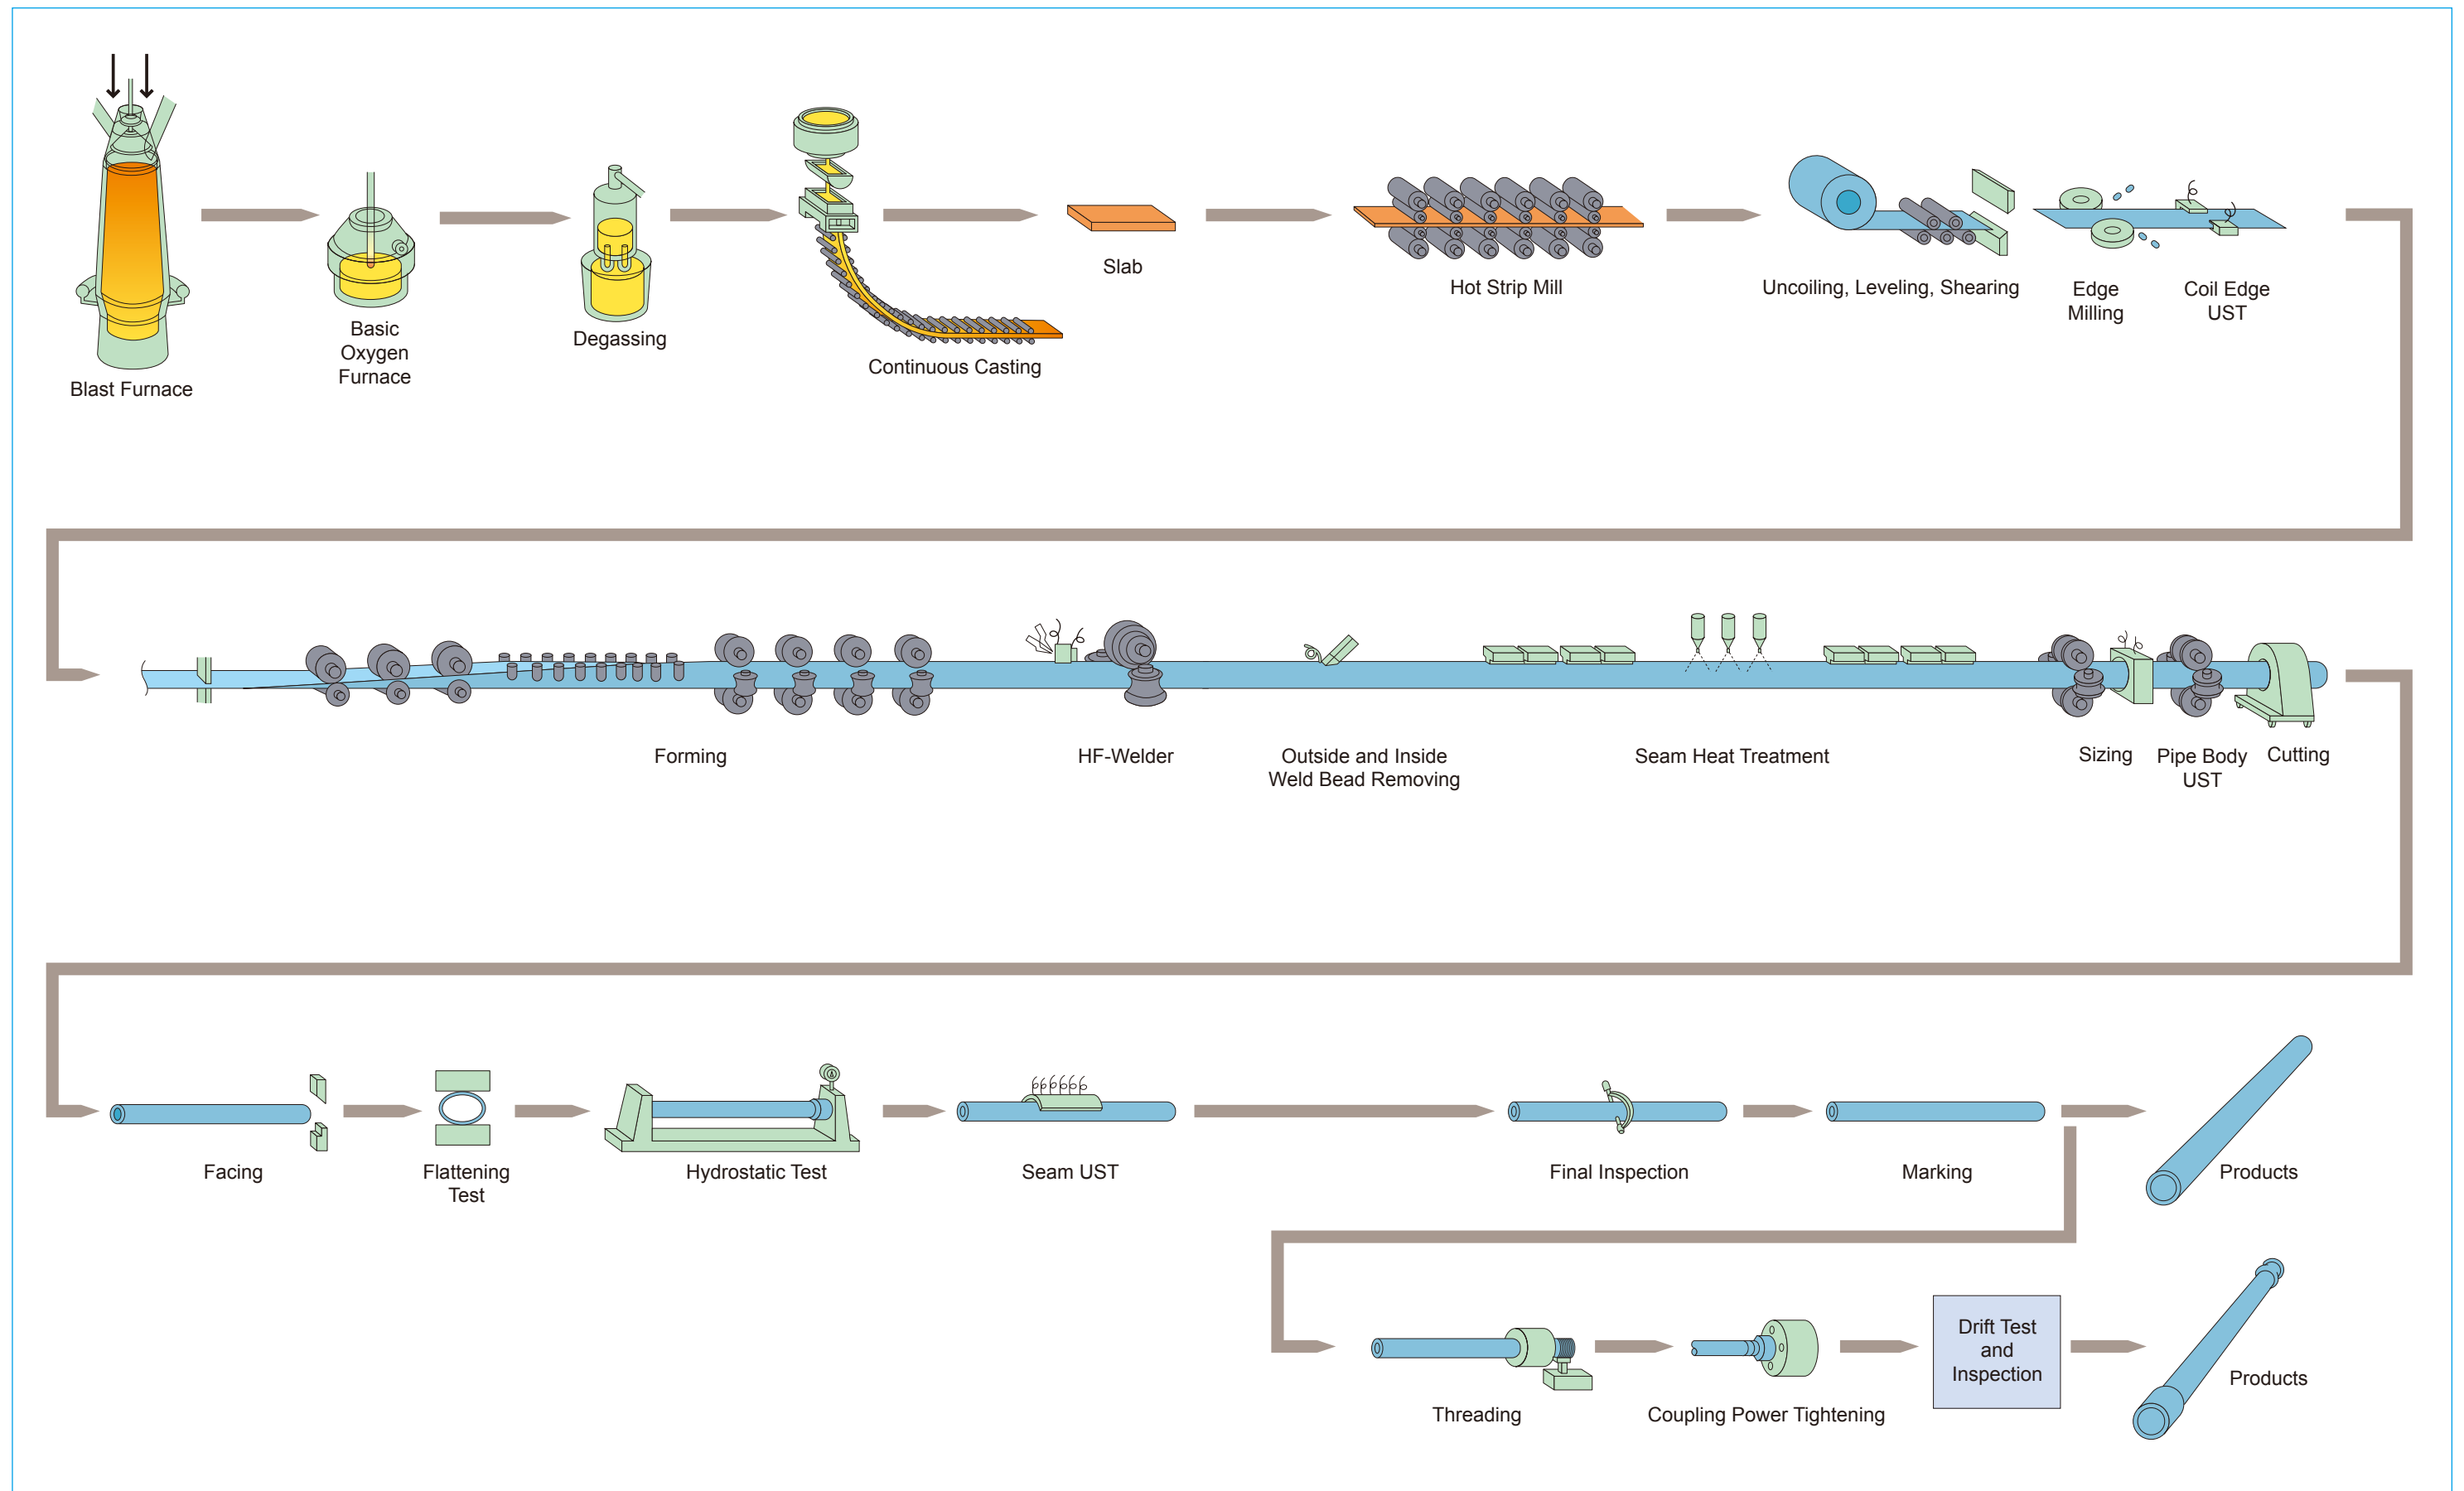


16-inch Mill Manufacturing Process

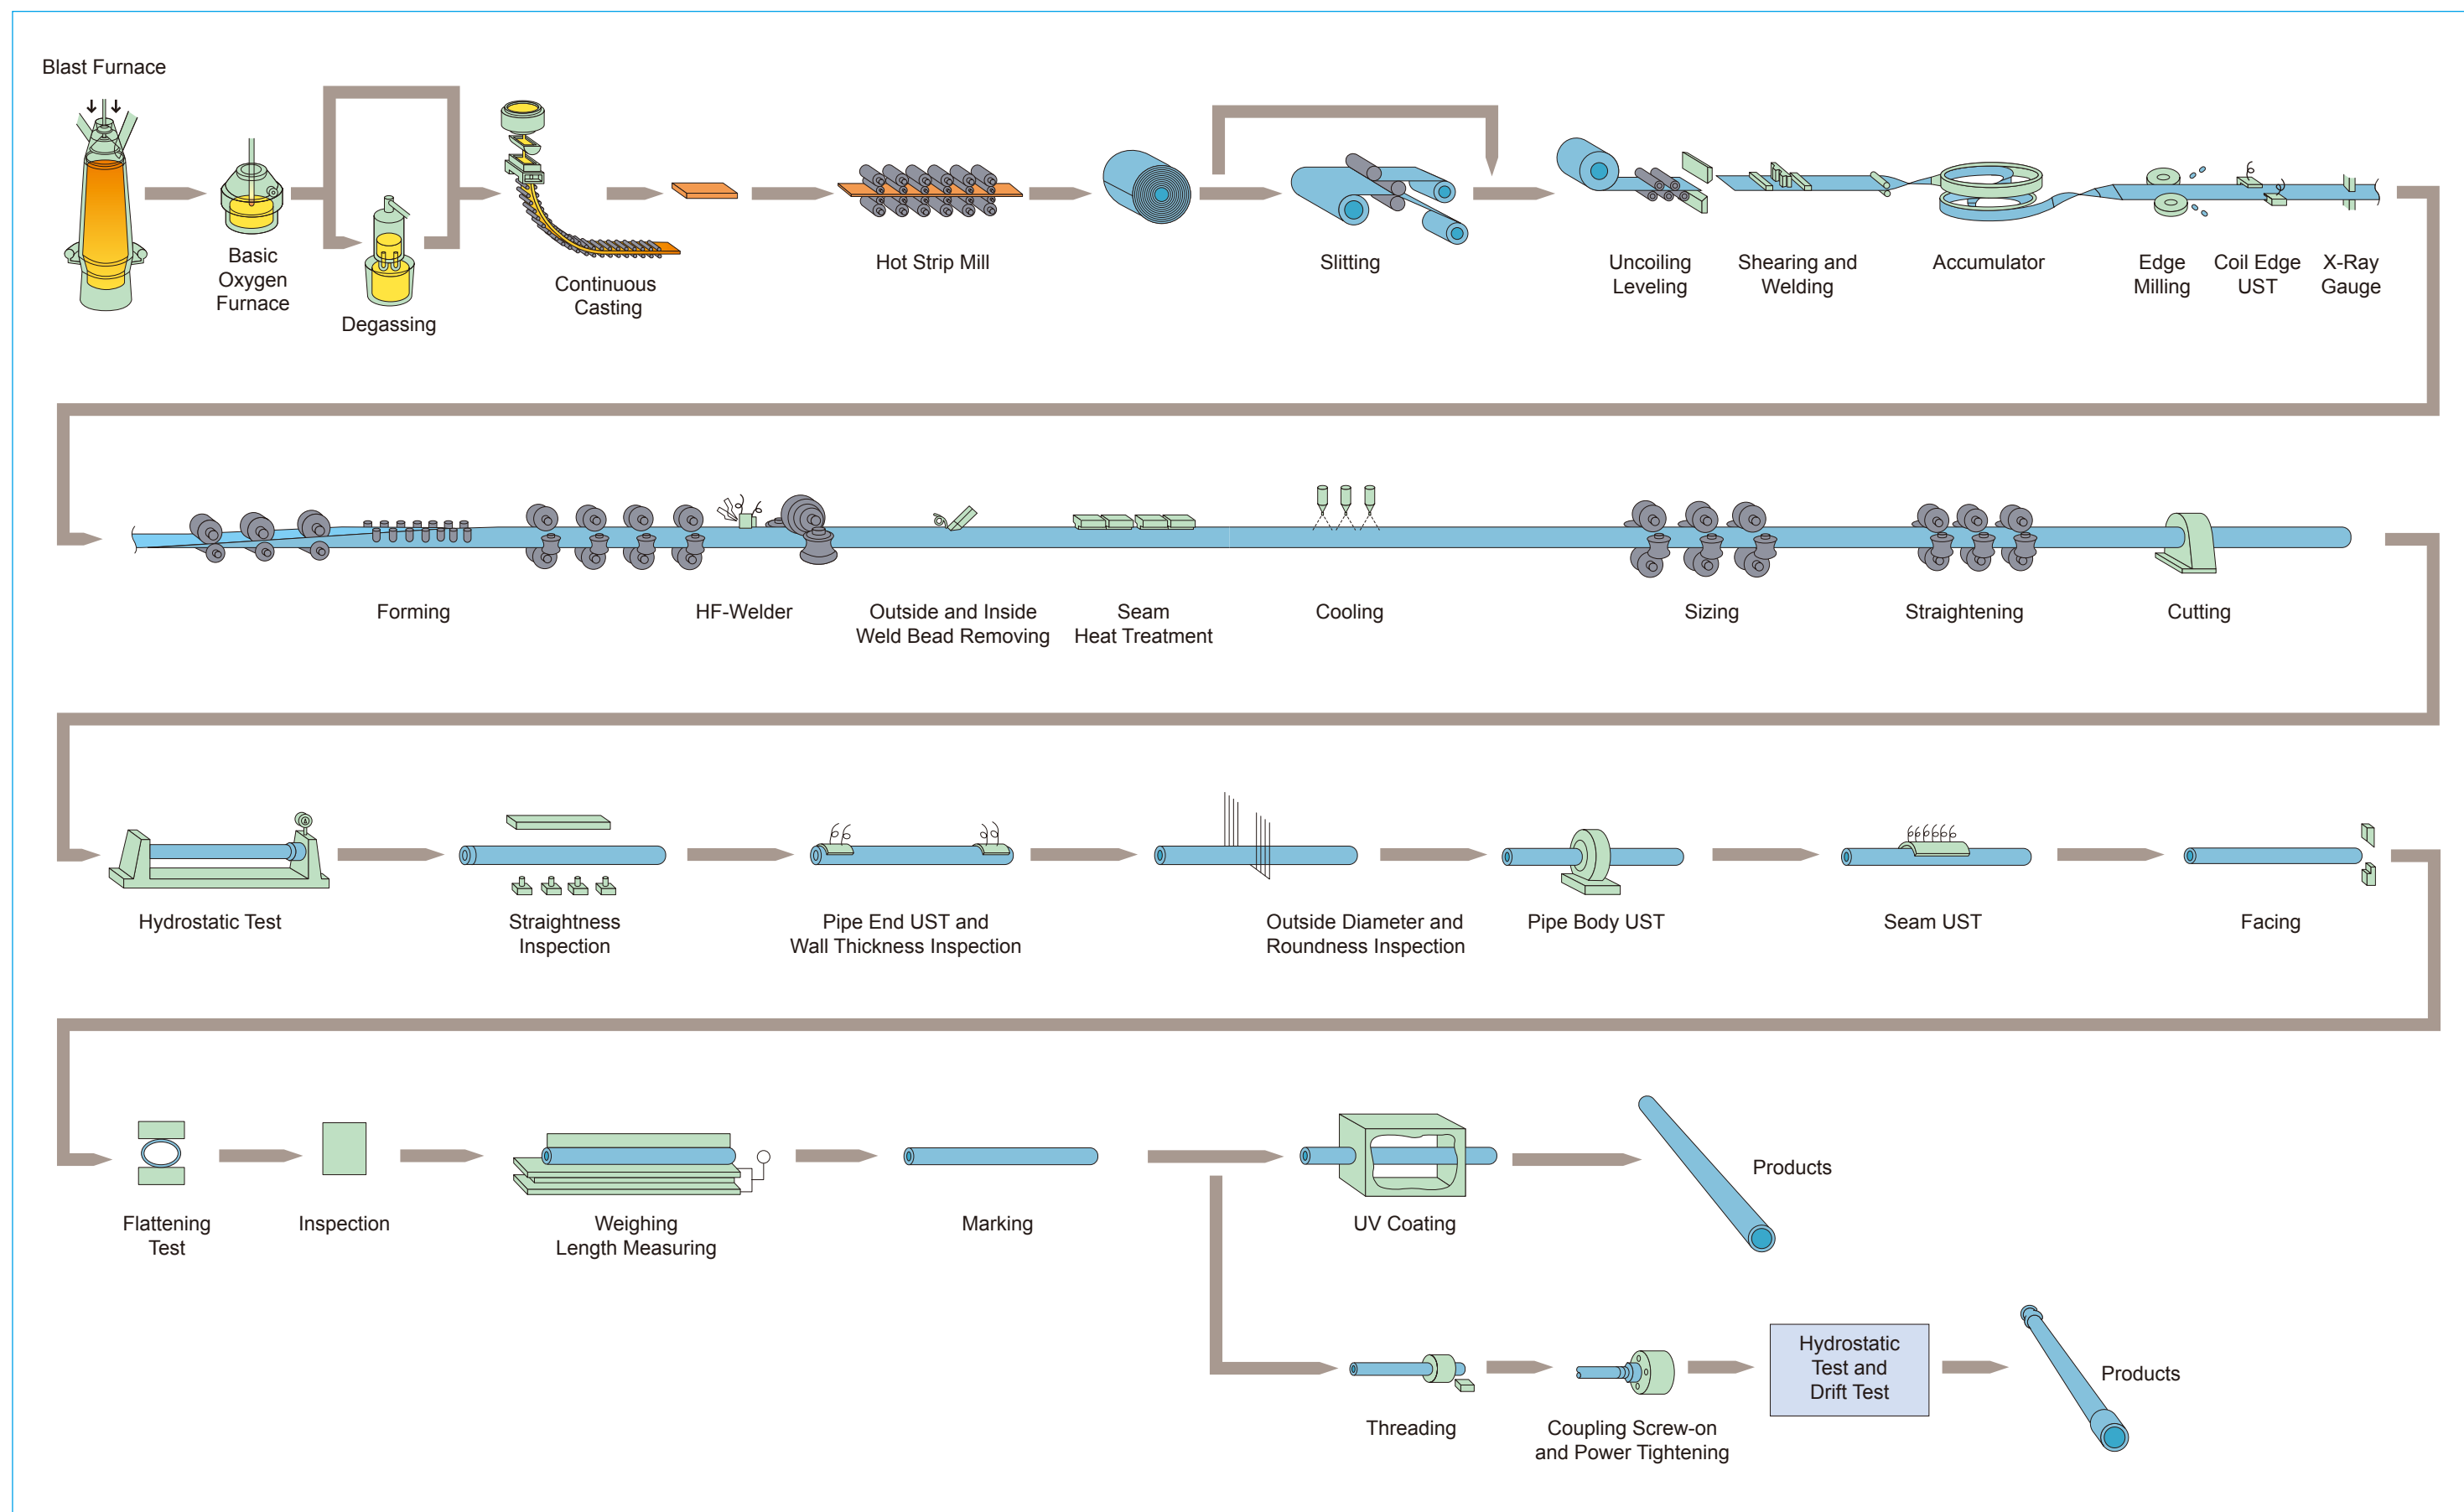

Principal Processes


Steelmaking

Degassing and desulphurizing during steelmaking process supply clean steel with low non-metallic inclusions.

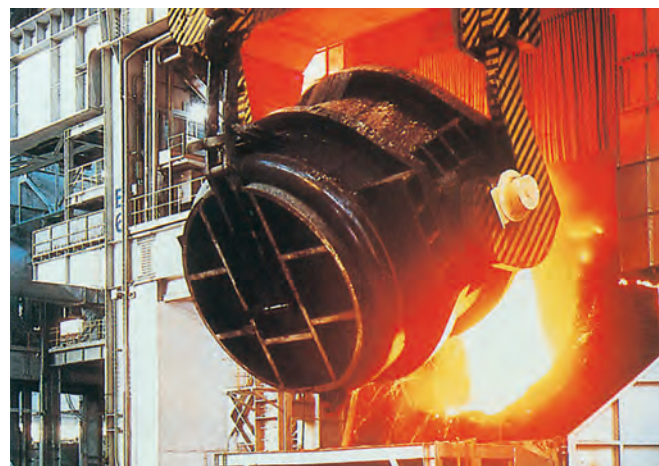

Hot Rolling

Advanced hot rolling supplies hot coils with fine grain structure and high dimensional accuracy.

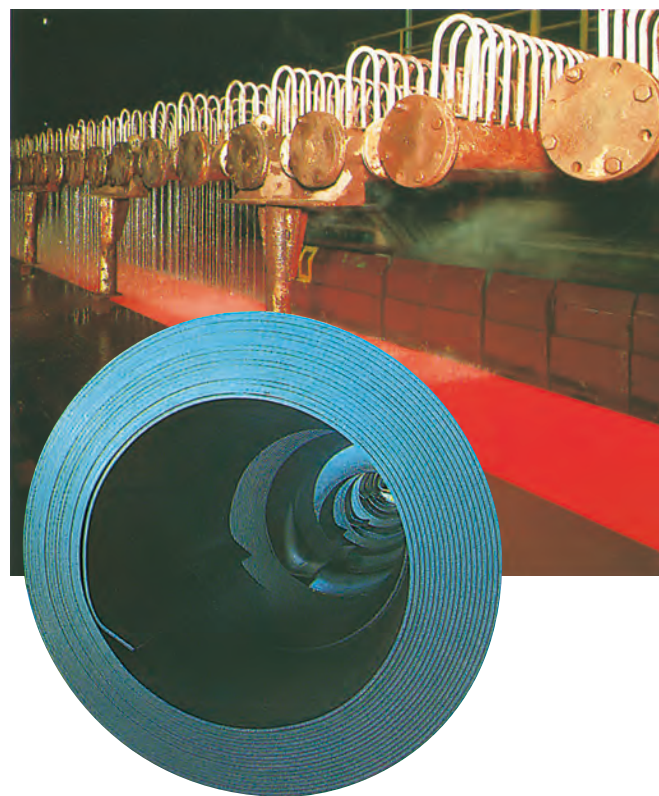

HF-Welder

High Frequency Welder


Heat input is controlled by NIPPON STEEL's advanced technology.



HF-ERW Weld Heat Input Control

1 Welding Phenomena

Varying combinations of welding heat input, welding speed, pipe wall thickness, etc. produce different weld results.

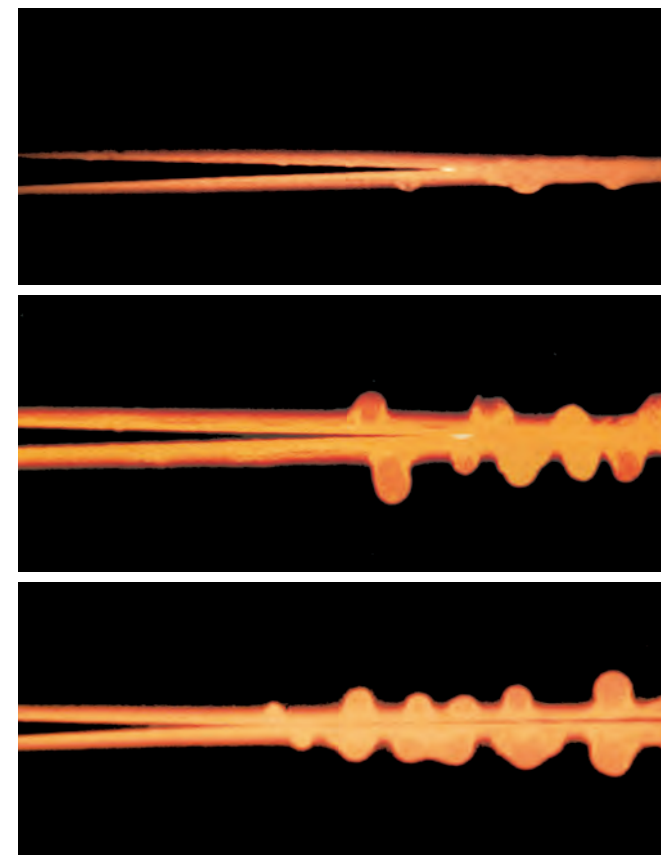

Classification of Welding Phenomena



2 Weld Heat Input Control

Welding conditions are monitored and controlled within the optimum range by using our unique weld heat input system to minimize oxides included in the weld seam.

Reliable NDT System


1 Coil Edge UST

After coil edge preparation, both edges of the coil are inspected for laminar imperfection with coil edge UST. (If required)

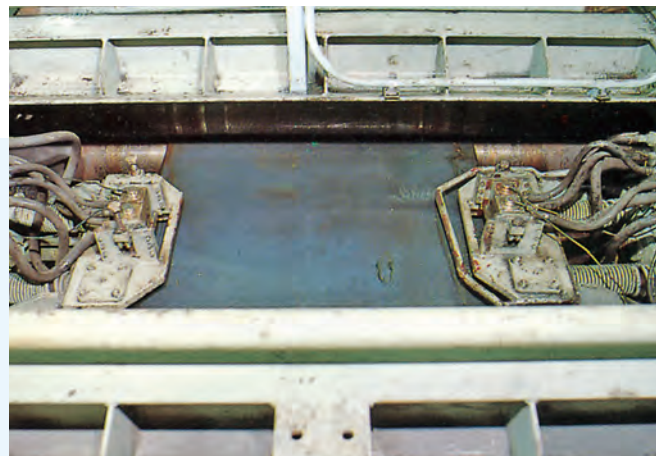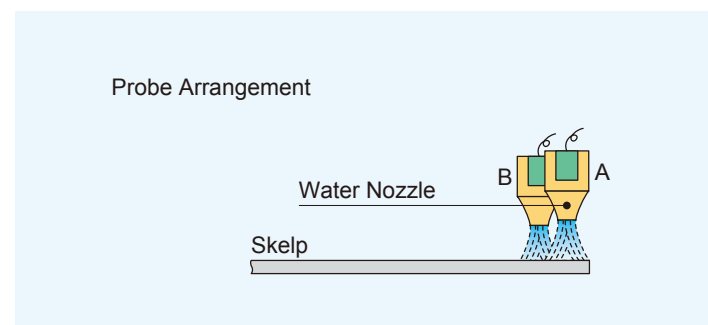



2 Full Body UST

Full body is inspected by a rotary UST unit along full length of welded pipe. (If required)

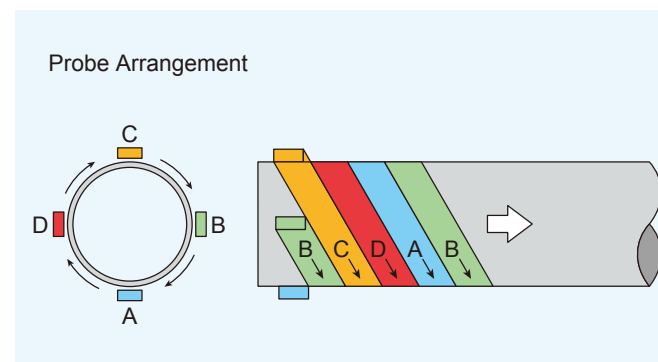

3 Weld Seam UST

Each pipe is inspected for weld seam imperfection with advanced automated UST for entire wall thickness.

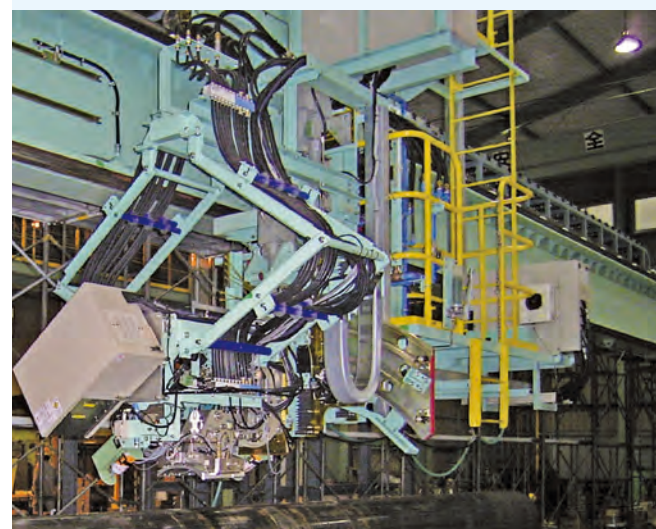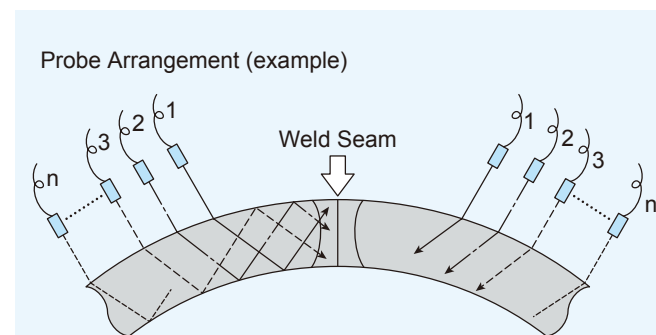

Seam UST

Size Range of ERW Pipe


NIPPON STEEL's ERW pipe mills produce pipe with outside diameters from 4-1/2 inches (114.3 mm) to 24 inches (609.6 mm). The equipment to produce such pipes reflects NIPPON STEEL's intent to meet the great demand for larger and heavier steel pipe.

Wall Thickness


To produce pipe with wall thickness up to 0.866 inches (22 mm) NIPPON STEEL has installed large scale forming & welding equipment.

Length

NIPPON STEEL's ERW mills can produce pipes with length up to 60 feet (18.3 m). These long pipes reduce the number of weld joints and inspections necessary at the site, thus leading to faster construction and lower costs.

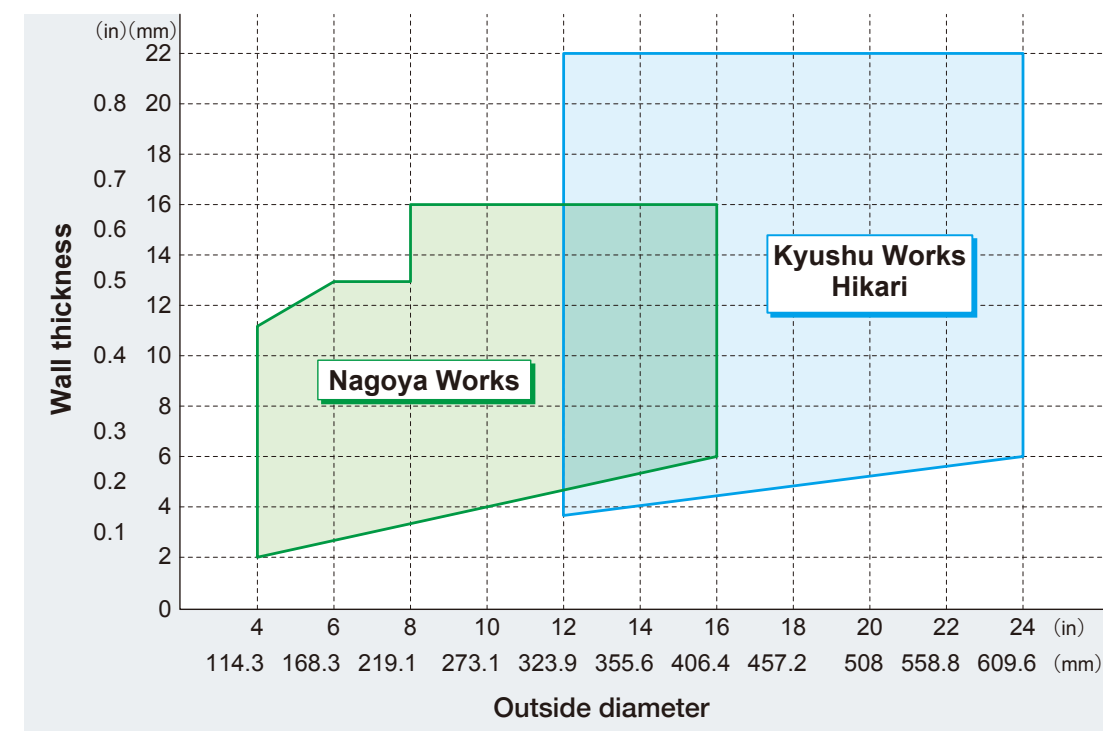

FACILITIES AND LOCATIONS

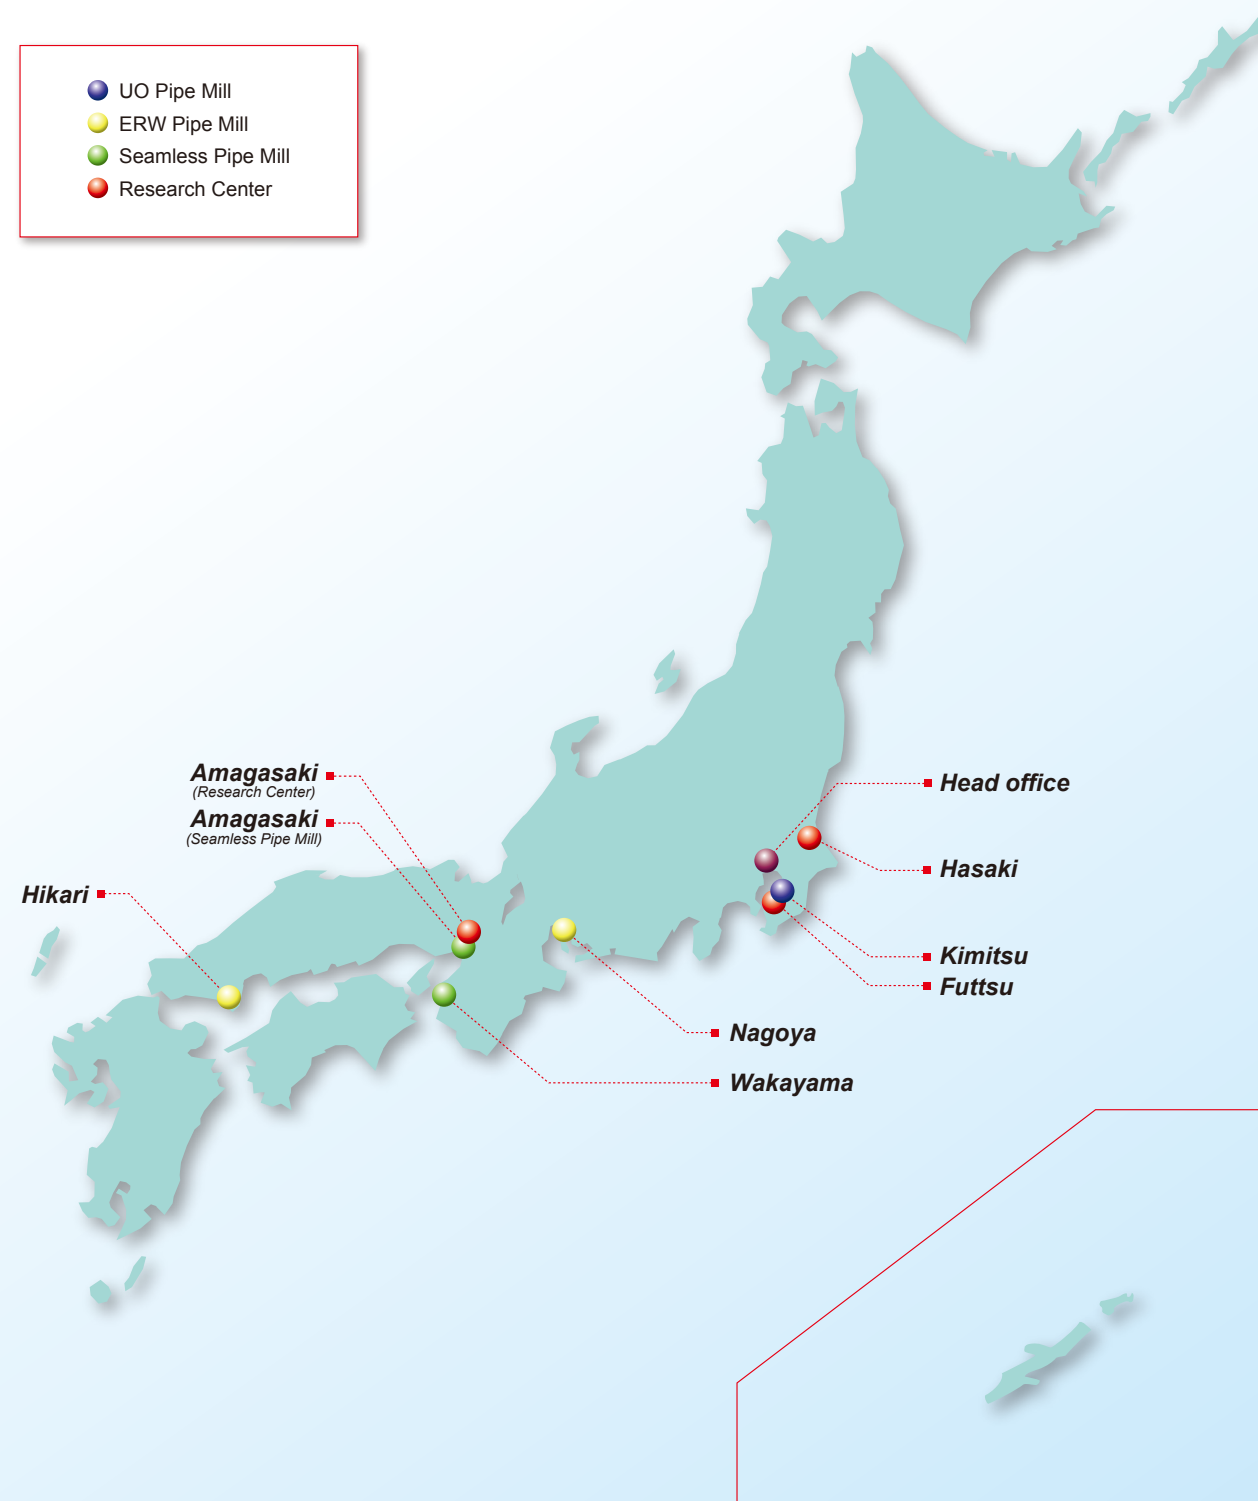

MEMO

MEMO